



TECHNICAL SPECIFICATION FOR:

PUMP 2.6-2.6

OVERVIEW

- ✔ Portable and compact on base frame with castors
- ✔ Fitted with a 16A 3Ph 5pin flying plug as standard
- ✔ High delivery pressure



DESCRIPTION

Celsius Hire's PUMP 2.6-2.6 is an ancillary selected to complement the hire fleet and assist in providing more complete plant room rental solutions. These can be included as part of a hired package or even hired in separately if required.

Celsius Hire can assist you in the equipment selection, as this unit has a wide range, changing with the conditions of the specific application.

DATA

DESIGN FLUID FLOW	2.6L/S
DESIGN HEAD PRESSURE	2.6Bar
LENGTH	800mm
WIDTH	310mm
HEIGHT	550mm
WEIGHT	40KG
FULL LOAD AMPS	5.8A
POWER CONNECTION	16A 3Ph 5pin Commando Plug
POWER TO MOTOR	Direct-online
FLUID COUPLING SIZE	50mm

CELSIUS HIRE

Call for your rental on:
0800 702 2161

Visit it us at:
www.celsiushire.com

Email us at:
info@celsiushire.com



All data is subject to change and continuous improvement without notice. All equipment is designed to relevant mechanical and electrical directives


© Celsius Hire.
All rights reserved.

Company No: 12763272

PUMP CURVE

Test standard: ISO 9906:2012 - Grade3B

Water, clean [100%] ; 293K; 998.3kg/m³; 1mm²/s

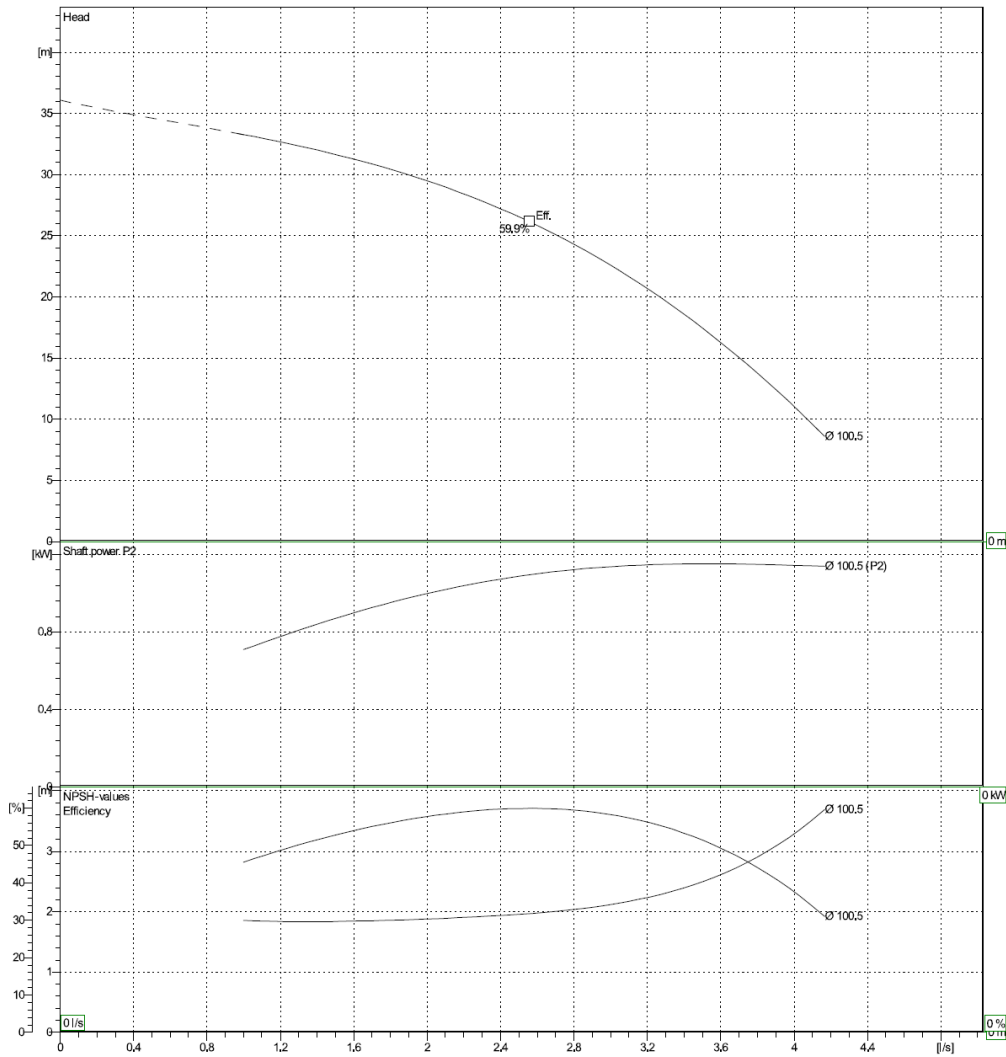

All data is subject to change and continuous improvement without notice. All equipment is designed to relevant mechanical and electrical directives

© Celsius Hire.
All rights reserved.

Company No: 12763272