



## TECHNICAL SPECIFICATION FOR:

# 125KW CHILLER

## OVERVIEW

- ✓ Integral 3bar pump
- ✓ Small, compact footprint
- ✓ Shell and tube evaporator immersed in a high volume buffer tank



## DESCRIPTION

Celsius Hire 125KW chiller is a compact, small footprint unit, selected due to its flexibility and handling across a variety of applications.

The chillers benefit from an integral circulation pump and a packaged evaporator immersed in a high volume buffer tank, enabling steady water/glycol temperatures as a result of increased volume. With a large temperature range of -15°C to +25°C, and Eurovent compliant design enabling great efficiencies even in high ambient temperatures, the Celsius Hire 150KW chiller is a safe bet, no matter the application.

The 125KW chiller can be connected directly onto the clients water/glycol circuit or be coupled with Celsius Hire's large range of fleet and ancillaries to provide air conditioned and low temperature environments.

## Celsius Hire

Call for your rental on:

**0800 702 2161**

Visit us at:

[www.celsiushire.com](http://www.celsiushire.com)

Email us at:

[info@celsiushire.com](mailto:info@celsiushire.com)



All data is subject to change and continuous improvement without notice. All equipment is designed to relevant mechanical and electrical directives

© Celsius Hire.  
All rights reserved.

Company No: 12763272

Call for your rental on:

0800 702 2161

Visit it us at:

[www.celsiushire.com](http://www.celsiushire.com)

Email us at:

[info@celsiushire.com](mailto:info@celsiushire.com)

## PERFORMANCE DATA AT DESIGN CONDITIONS

DESIGN CONDITIONS	°C	7°C Supply / 12°C Return / 30°C Ambient
COOLING CAPACITY	KW	125KW
FLUID FLOW	L/S	6.0

## OPERATING LIMITS

MIN/MAX SUPPLY TEMPERATURE	°C	-15 / +20
MIN/MAX AMBIENT TEMPERATURE	°C	-10 / +45
MIN/MAX FLUID FLOW	L/S	4.0/8.0
MAX PUMP DELIVERY PRESSURE	Bar	2.8
CHILLER WATER VOLUME	L	500
MAX WORKING PRESSURE	Bar	6.0

## ELECTRICAL DATA

ELECTRICAL SUPPLY VOLTAGE	V	410
SUPPLY		3Ph & E, No Neutral
POWER CONNECTIONS	Fitted Plug	125A 3Ph 5pin CEE-FORM
FULL LOAD RUNNING CURRENT (MAX)	A	114
START-UP CURRENT (MAX)	A	180
MAX POWER ABSORBED	KW	44

## PHYSICAL DATA

LENGTH	mm	3,930
WIDTH	mm	1,600
HEIGHT	mm	2,120
WEIGHT (DRY)	KG	1,600
WEIGHT (WET)	KG	2,100
FLUID COUPLING SIZE	mm	50
SOUND PRESSURE	dB(A) at 10 metres	62.3

## COOLING SYSTEM DATA


REFRIGERANT GAS	HFC	R410A / R454B
REFRIGERANT QUANTITY	Kg (Total)	48KG
NUMBER OF CIRCUITS	Total	2
NUMBER OF COMPRESSORS	Total	4
NUMBER OF FANS	Total	4
FAN TYPE		Axial



All data is subject to change and continuous improvement without notice. All equipment is designed to relevant mechanical and electrical directives

© Celsius Hire.  
All rights reserved.

Company No: 12763272

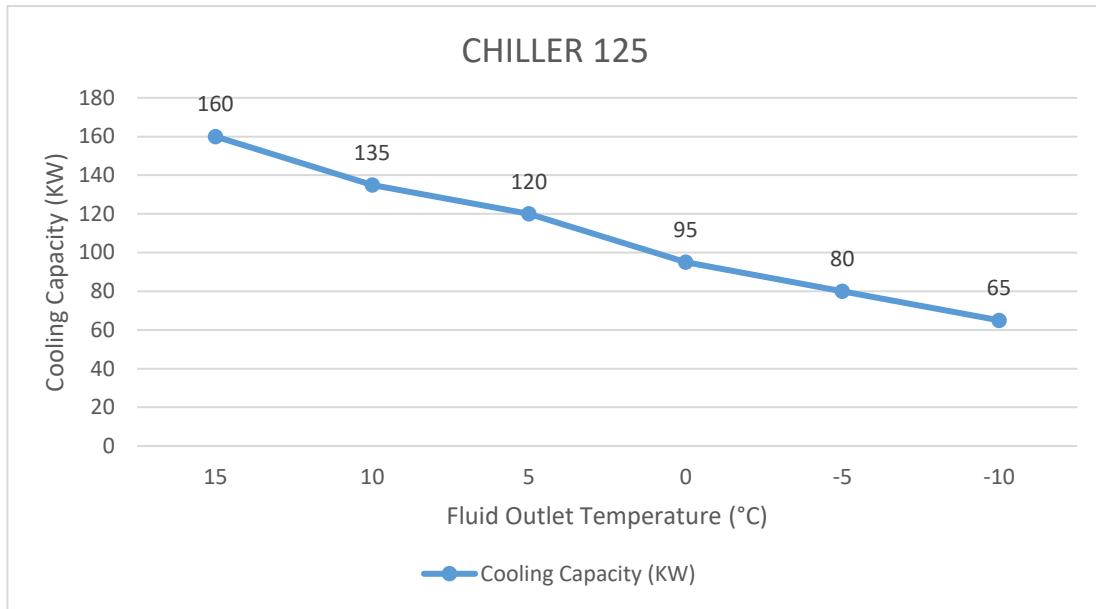

This 'de-rate table' is a rough guide as to chiller cooling capacity at different outlet fluid temperatures allowing for quick selection on applications. It is based on a 30°C ambient temperature and glycol mix to suit outlet temperature. For accurate selection we are able to run a full selection on your application.



All data is subject to change and continuous improvement without notice. All equipment is designed to relevant mechanical and electrical directives

© Celsius Hire.  
All rights reserved.

Company No: 12763272